


| | | | |
|--------------------|-------|------------|------|
| Drawing No. | *Rev. | Date | Page |
| BF5H55GA-YHR-150mA | A | 2019/01/22 | 1/3 |

APPROVAL SHEET

Part No: **BF5H55GA-YHR-150mA**

NOTE : Green Part


| MAKER | | | CUSTOMER | |
|---|----|-------|----------|----------|
|  | | | | |
| R&D | QA | Sales | Checked | Approved |
| | | | | |

| | | |
|------------|-----------|------------|
| Prepared | Checked | Approved |
| Rachel Lee | Hann Chiu | Kenneth Wu |

LED LAMP Technical Data

DESCRIPTION:

Device Type : BF5H55GA-YHR-150mA
 Dice Material : AlGaAs
 Emitting Wavelength : InfraRed 850nm
 Lens Color : Water Clear
 Lens Dimension : 5 mm

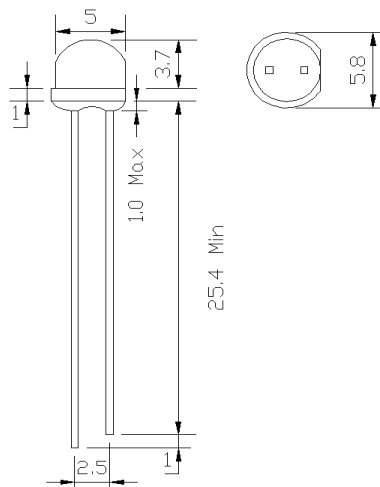

Absolute Maximum Ratings at Ta=25°C

| Parameter | Max. | Unit |
|--|-------------------|------|
| DC Forward Current | 150 | mA |
| Reverse Voltage | 5 | V |
| Power Dissipation | 300 | mW |
| Operating Temperature | Topr : -40 ~ +80 | °C |
| Storage Temperature | Tstr : -40 ~ +100 | °C |
| Solder DIP (MAX. 5 seconds, 1.6mm from body) Temperature 260°C | | |


Electrical and Optical Characteristics at Ta=25°C

| Symbol | Description | Test Condition | Min. | Typ. | Max. | Unit |
|----------------|--------------------------|------------------------|------|------|------|------|
| V _F | Forward Voltage | I _F = 150mA | - | 1.6 | 2.0 | V |
| I _R | Reverse Current | V _R = 5V | - | - | 10 | μA |
| λ _p | Peak Emission Wavelength | I _F = 150mA | - | 850 | - | nm |
| Δλ | Spectral Line Halfwidth | I _F = 150mA | - | 50 | - | nm |
| 2θ 1/2 | Viewing Angle | I _F = 150mA | - | 55 | - | Deg. |
| P _o | Radiant Power | I _F = 150mA | 30 | 50 | - | mW |


- Note:
1. The lead should be formed up to 5mm from the body of device without forming stress.
 2. Soldering shall be performed after lead forming.
 3. All dimensions are in millimeters
 4. Suggest: the better current for this device is less than 100mA.

LED LAMP Technical Data


Typical Optical-Electrical Characteristic Curves

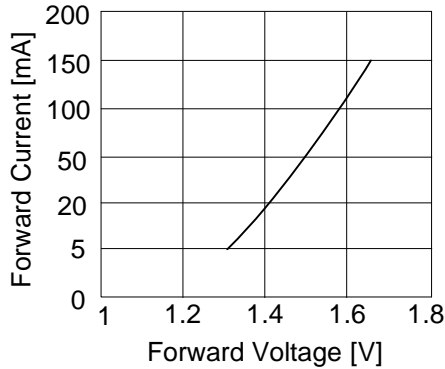


**Forward Current
Vs. Forward Voltage**

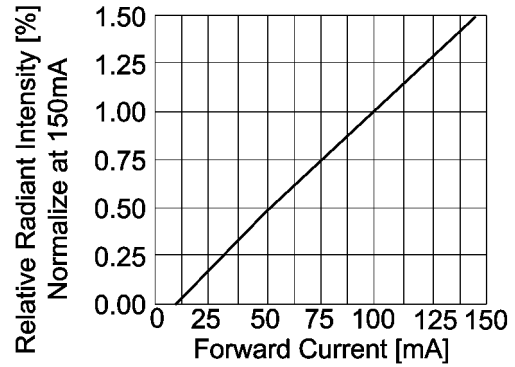


**Luminous Intensity
Vs. Forward Current**

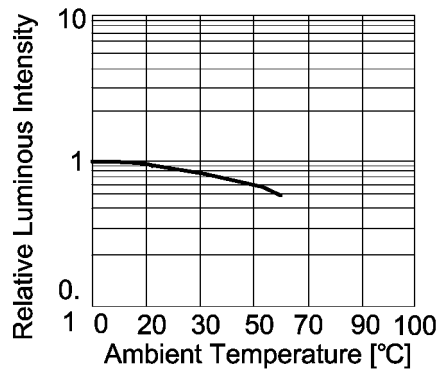


**Luminous Intensity
Vs. Ambient Temperature**

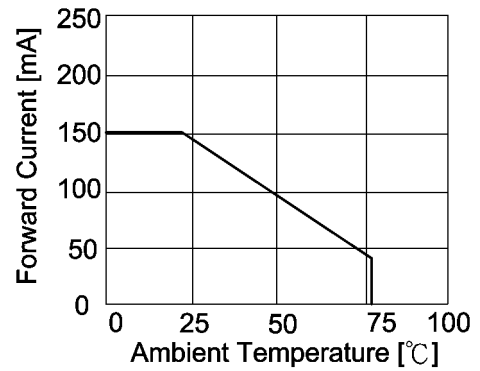

**Forward Current
Vs. Ambient Temperature**

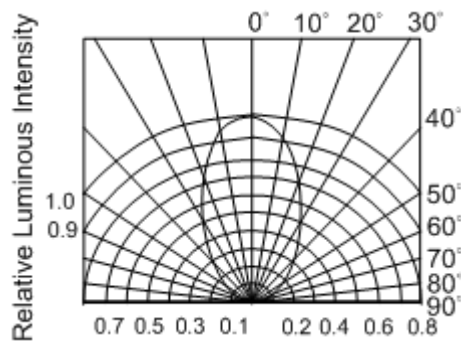

Radiation Pattern

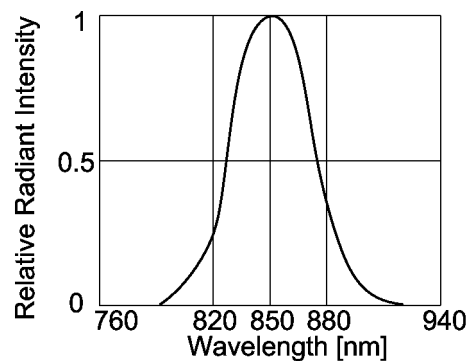

**Relative Luminous Intensity
Vs. Wavelength**