





Drawing No.	Rev.	Date	Page
SL-TL2018W4B-DSB-A	A	2022/10/19	1/4

# APPROVAL SHEET

Part No: **SL-TL2018W4B-DSB-A**


**NOTE :**  
**Plant Growth LED Lamp**

MAKER			CUSTOMER	
				
R&D	QA	Sales	Checked	Approved
				


Prepared	Checked	Approved
Rachel Lee	Jacky Shih	Kenneth Wu


Drawing No.	Rev.	Date	Page
SL-TL2018W4B-DSB-A	A	2022/10/19	2/4

**Description of P/N No.**

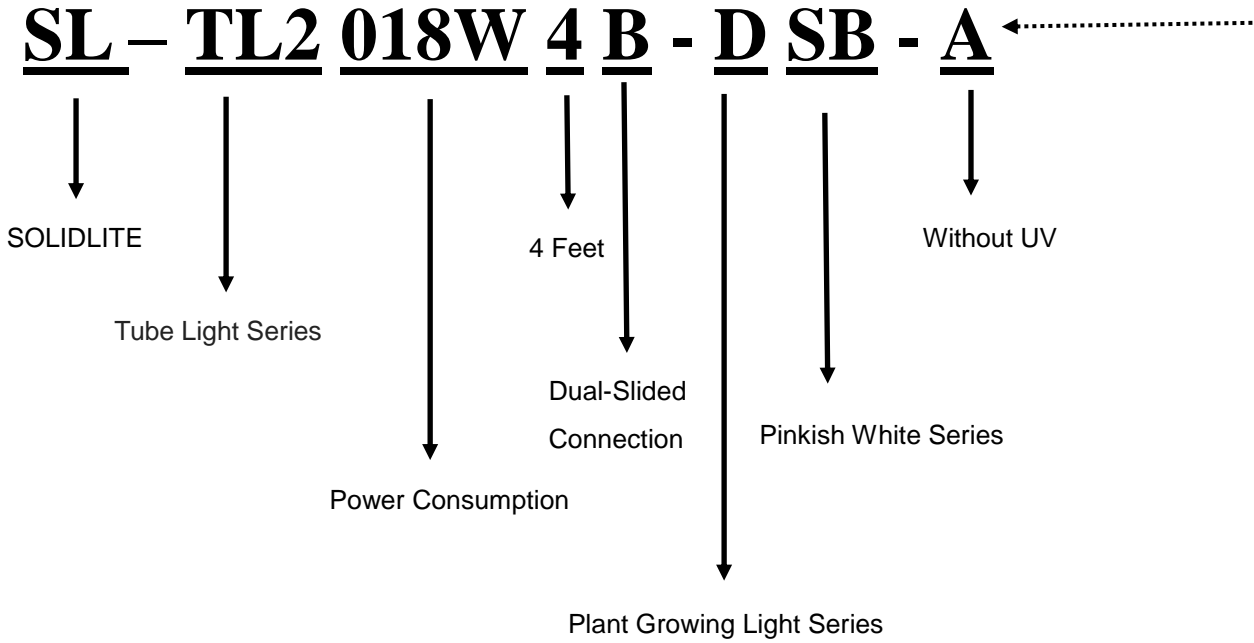

**Description of Lot.**

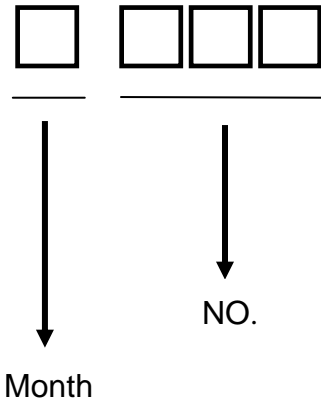

**Solidlite Corp.** 

P/N : \_\_\_\_\_

Lot : \_\_\_\_\_

Date: \_\_\_\_\_ . Rank: \_\_\_\_\_ .

Q'ty : \_\_\_\_\_ . QA : \_\_\_\_\_ .

Drawing No.	Rev.	Date	Page
SL-TL2018W4B-DSB-A	A	2022/10/19	3/4

## 1、Product Info：

[Product Name]：Waterproof Plant Tube Light

[Product Number]：SL-TL2018W4B-DSB-A

[Types]：110V 50/60Hz 18W & 220V 50/60Hz 18W

[Viewing Angle]：90°

[Product Photo]：See Below

[Product Size]：25.4\*1200mm

[Net Weight]：200g

[Ingress Protection Rating]：IP67

[Life Expectancy of Driver]：2-year warranty

[Life Expectancy of LEDs]：2-year warranty



## 2、Product Spec. :

Product No.	SL-TL2018W4B-DSB-A
Input Voltage	85~265VAC
Power Consumption	18W
Power Factor	0.9
Operation Temperature	-20°C ~ 40°C
Beam Angle	90 Degree
IP Level	IP 67
Lamp bead	Pinkish White

## Photosynthetic Photon Flux Density

Distance	PPFD ( $\mu\text{mole}/\text{m}^2\cdot\text{s}$ )(Typ.)	Distance	PPFD ( $\mu\text{mole}/\text{m}^2\cdot\text{s}$ )(Typ.)
5cm	234	25cm	77
10cm	150	30cm	69
15cm	121	35cm	60
20cm	98	40cm	56

